



# 慶泰樹脂



## ACC系列 PU耐候型透明防護塗料

### ACC series polyurethane transparent protective coating

#### 一、特點：

本系列產品為不黃變耐候型透明PU漆，塗膜堅韌，密著優且施工方便。專為磨石子面、抵石子面、大理石地面、木材板面、水泥面等保護塗裝用，塗裝後可得到耐磨損、耐陽光的透明塗膜，永保清新亮麗。

#### 二、性狀：

##### 底漆 ACC-09

配合比例：ACC-09：N-750 = 9：1

指觸乾燥：20 - 40 分鐘

硬化乾燥：24 小時

##### 面漆 ACC-06

配合比例：ACC-06：N-750 = 8：1

指觸乾燥：20 - 40 分鐘

硬化乾燥：24 小時

#### ◎ Features :

This product is a non-yellowing, weather resistance and transparent polyurethane protective coating material, it cures to form an abrasion resistance, weather resistance and maintains highly aesthetic significantly. This product also offers the flexible, strong adhesion and easy to application specially designed for terrazzo, stone marble, wood and concrete surface.

When applied to surface such as terrazzo, stone, timber, it provides waterproof, corrosion resistance, dust proof and wear resistance. This product is the premium quality protective coating material.

#### ◎ Physical Properties :

##### Primer ACC-09

Mixing ratio : ACC-09 : N-750 = 9:1

Tack free time : 20-40 minutes

Curing time : 24 hours.

##### Top coat ACC-06

Mixing ratio : ACC-06 : N-750=8 : 1

Tack free time : 20-40 minutes

Curing time : 24 hours.



### 三、施工方式：


可噴塗、滾塗、刷塗。最建議為無氣噴塗

### ◎ Application :

Spray, roller or brush. Airless spray is recommended

### 四、注意事項：

- 1.依比例配合，不用加 Thinner 即合適於塗裝，必要時可加 PU-Thinner 調整黏度。
- 2.必須塗二道以上，一底一面或一底二面，塗裝間隔 4 小時。
- 3.細緻大理石地表要先行處理，使能有粗糙度，以利接著。處理方法是以 10% Hcl 浸蝕 10~30 分後，經水洗二次即可，必要時再用 1% 氨水中和之，待地面完全乾燥後即可塗佈 ACC-06 系列塗料。
- 4.硬化劑易和水氣反應而膠化變質，故桶蓋務必蓋緊。

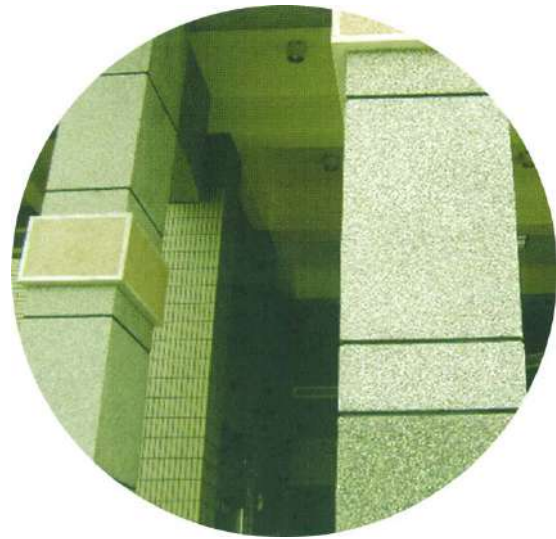

### ◎ Limitation :

1. According to the mixing ratio. Can add in the proper amount of PU-thinner to adjust the viscosity while necessary.
2. At least two coats or above are required; the recoat time is 4 hours.
3. The surface should be 10% hydrochloric acid etched for 10-30 min then water rinsed twice and necessarily neutralized by 1% ammonia water Allow to dry thoroughly before ACC-06 series application
4. The hardener should be tightly sealed immediately after use.



 慶泰樹脂化學股份有限公司

總公司：台中市大甲區日南幼獅工業區工二路 50 號  
洽詢專線：TEL：04-26816835-9 FAX：04-26811361

網址：<http://www.chingtai-resins.com.tw>

E-MAIL：[service@chingtai-resins.com.tw](mailto:service@chingtai-resins.com.tw)

台北營業所：TEL：02-22392356 FAX：02-22392357

高雄營業所：TEL：07-7497891 FAX：07-7497893