


VEXCON

Performance Construction Chemicals

混凝土防護質感塗料



慶泰樹脂化學股份有限公司
CHINGTAI RESINS CHEMICAL CO., LTD.

混凝土防護質感塗料所形成的透氣保護塗層能使得混凝土、石造、木造，等素材紋理具層次感，並同時提供耐候性與防水性，可提避免因自然因素造成的混凝土風化現象。相較於傳統需施作底漆塗料的工法，混凝土防護質感塗料免底漆的工法更具省時及經濟效益。

表面預處理

- 清潔表面，直至無異物、油脂、瀝青、污點和粉狀物。
- 舊有混凝土或磚石表面如有鱗狀殘留物，需噴砂或以鋼刷處理。
- 小裂紋，孔洞和瑕疵施以混凝土砂漿進行修補。

施工

- 施作前，**務必以機器攪拌均勻**。
- 可施作於潮溼混凝土或磚造表面。
- 勿施作於即將下雨，結霜或結凍表面。依上述條件施工，6-8小時後才耐雨淋。
- 環境溫度 4 °C 即可施工，詳細施工溫度，請洽詢業務代表。
- 高度起風的天氣，請勿施作。

包裝

- 單液 20 公斤裝

顆粒選擇

- 平滑(無顆粒)
- 細顆粒
- 粗顆粒

塗佈量 kg/m² ● 平滑面單層塗佈量：0.32-0.41 ● 顆粒面單層塗佈量：0.43-0.61



慶泰樹脂化學股份有限公司

台中市大甲區工二路 50 號

TEL:04-26816835 FAX:04-26811329

台北：02-22392356 高雄：07-7497891

This product provides an attractive, breath able, protective coating that enhances the aesthetic appearance of vertical concrete, masonry, block, wood and primed metal surfaces. Provides excellent adhesion and years of weathering and waterproofing protection from the elements. The product's one coat application saves time and money over typical two and three coat systems.

SURFACE PREPARATION

- Surfaces should be cleared of all foreign materials such as oil, grease, asphalt, atmospheric stains, dirt and powdery substances using one of Vexcon's Concrete and Masonry Cleaners .
- On existing masonry or concrete surfaces where there is loose scaly residue, sandblasting or wire brushing may be necessary.
- Small cracks, voids and blemishes may be filled with cement mortar.

APPLICATION

- StarSeal HBC Textured or HBC Smooth Emulsion may be applied to damp concrete or masonry surfaces.
- Material must be mechanically stirred thoroughly before use. Shaking is not sufficient, mechanical mixing must be used.
- Do not apply if rainfall is imminent or on frosted or frozen surfaces. Properly applied in accordance to conditions, rain resistance 6-8 hrs.
- Can be applied when air and surface temperatures are 4°C - 29°C. Detailed construction temperature, please contact sales representative
- Do not apply on highly windy days.

Coverage

- Smooth : 0.32-0.41 kg/m²
- Fine & Medium : 0.43-0.61 kg/m²

PARTICLE OPTION

- Smooth
- Medium
- Fine

PACKAGE



CHINGTAI RESINS CHEMICAL CO., LTD


No.50, Gong 2nd Rd., Dajia Dist., Taichung City 437, Taiwan (R.O.C)

TEL:04-26816835 FAX:04-26811329 <http://www.chingtai-resins.com.tw/>

VEXCON

Performance Construction Chemicals

混凝土防護質感塗料

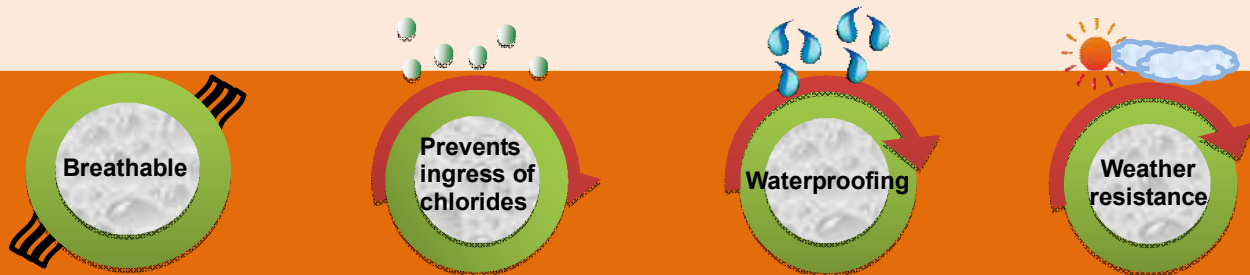

慶泰樹脂化學股份有限公司
CHINGTAI RESINS CHEMICAL CO., LTD.